


# JIS Standard Ejector Pin

**BORUN**

日标顶针

**NITONI 米塔米®**

Material 材质	SKD61(1.2343)
Surface Hardness 表面硬度	HV1000±100
Inside Hardness 内部硬度	HRC40-45

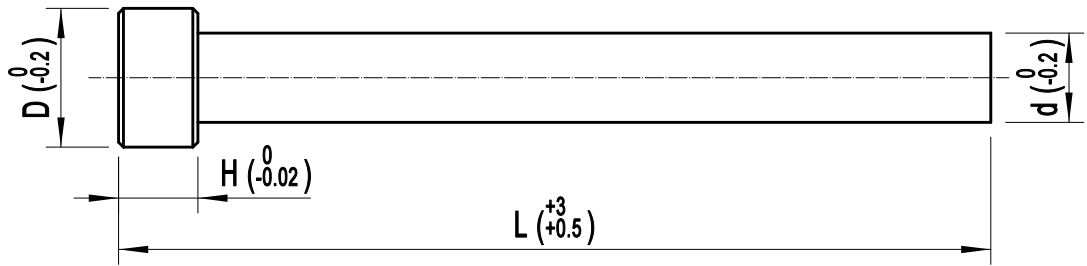

(unit: mm)

d	1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	8	9	10	12	13	16	20	25
	-0.008~-0.018					-0.010~-0.020					-0.015~-0.022					-0.018~-0.027					
D	(3)6	6			7	8	9	10			11	13	14	15	17	18	21	25	30		
H	4					6						8									

d	L									
	100	150	200	250	300	350	400	450	500	
1-1.2	•	•	•	•	•	•	•	•	•	
1.5	•	•	•	•	•	•	•	•	•	
2.0	•	•	•	•	•	•	•	•	•	
2.5	•	•	•	•	•	•	•	•	•	
3.0	•	•	•	•	•	•	•	•	•	
3.5	•	•	•	•	•	•	•	•	•	
4.0	•	•	•	•	•	•	•	•	•	
4.5	•	•	•	•	•	•	•	•	•	
5.0	•	•	•	•	•	•	•	•	•	
5.5	•	•	•	•	•	•	•	•	•	
6.0	•	•	•	•	•	•	•	•	•	
6.5	•	•	•	•	•	•	•	•	•	
7.0	•	•	•	•	•	•	•	•	•	
8.0	•	•	•	•	•	•	•	•	•	
9.0	•	•	•	•	•	•	•	•	•	
10.0	•	•	•	•	•	•	•	•	•	
12.0	•	•	•	•	•	•	•	•	•	
13.0	•	•	•	•	•	•	•	•	•	
16.0	•	•	•	•	•	•	•	•	•	
20.0	•	•	•	•	•	•	•	•	•	
25.0	•	•	•	•	•	•	•	•	•	

顶针  
EJECTOR PIN