


DIN 9861D Standard Punch

BORUN

DIN 9861D 标准冲头

NITONI 米塔米®

Material 材质	HSS/SKD11/WS
Head Hardness 头部硬度	HRC45±5
Body Hardness 杆部硬度	HRC62±2

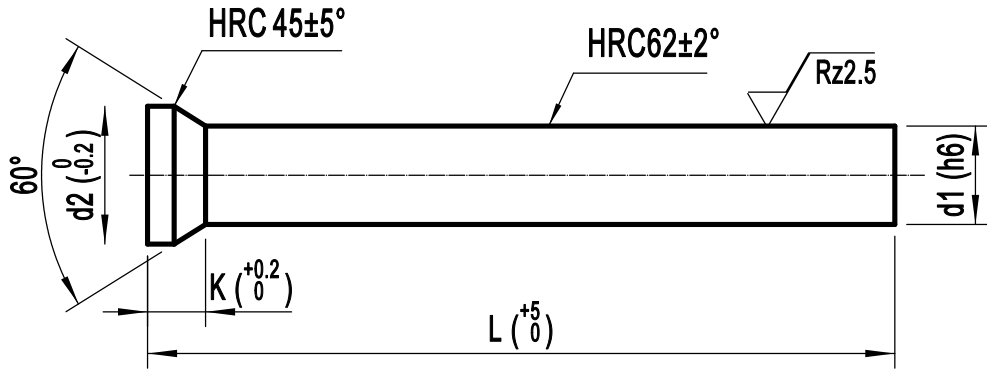

(unit: mm)

d1	d2	K	L			
			71.00	80.00	100.00	130.00
h6	-0.2	+0.2	71.00	80.00	100.00	130.00
0.5	0.9	0.2	•	•	•	•
0.6	1.1	0.2	•	•	•	•
0.7	1.3	0.2	•	•	•	•
0.8	1.4	0.4	•	•	•	•
0.9	1.6	0.4	•	•	•	•
1.0	1.8	0.5	•	•	•	•
1.1	1.8	0.5	•	•	•	•
1.2	2.0	0.5	•	•	•	•
1.3	2.0	0.5	•	•	•	•
1.4	2.2	0.5	•	•	•	•
1.5	2.5	0.5	•	•	•	•
1.6	2.5	0.5	•	•	•	•
1.7	2.5	0.5	•	•	•	•
1.8	2.8	0.5	•	•	•	•
1.9	2.8	0.5	•	•	•	•
2.0	3.0	0.5	•	•	•	•
2.1	3.2	0.5	•	•	•	•
2.2	3.2	0.5	•	•	•	•
2.3	3.5	0.5	•	•	•	•
2.4	3.5	0.5	•	•	•	•
2.5	3.5	0.5	•	•	•	•
2.6	4.0	0.5	•	•	•	•
2.7	4.0	0.5	•	•	•	•
2.8	4.0	0.5	•	•	•	•
2.9	4.0	0.5	•	•	•	•
3.0	4.5	0.5	•	•	•	•
3.1	4.5	0.5	•	•	•	•
3.2	4.5	0.5	•	•	•	•
3.3	4.5	0.5	•	•	•	•
3.4	4.5	0.5	•	•	•	•
3.5	5.0	0.5	•	•	•	•
3.6	5.0	0.5	•	•	•	•
3.7	5.0	0.5	•	•	•	•
3.8	5.0	0.5	•	•	•	•
3.9	5.0	0.5	•	•	•	•
4.0	5.5	0.5	•	•	•	•
4.1	5.5	0.5	•	•	•	•
4.2	5.5	0.5	•	•	•	•
4.3	5.5	0.5	•	•	•	•
4.4	5.5	0.5	•	•	•	•
4.5	6.0	0.5	•	•	•	•
4.6	6.0	0.5	•	•	•	•
4.7	6.0	0.5	•	•	•	•
4.8	6.0	0.5	•	•	•	•

冲头
PUNCH